

Brillante Series Strip Lights

BMS-145-x

Brillante Series



Data Sheet

Overview

The Brillante Series features a wide array of single colored and RGB LED strips that use high brightness 5050 SMD LED. Colors can be controlled by controllers. It can be static red, blue, purple, green, yellow or white. Jumpy or gradual changing is also available.

Key Features

- Water proof IP65/66 protection versions are available
- Operations on 12VDC or 24VDC
- Strips can be extended over long distance using amplifier units
- Standard 5 meter/reel in strip form or rigid aluminum bar form at 1.0 & 1.5m lengths
- Silicon and PE Sleeves for strip lights
- Wired and wireless programmable controller

Specifications

Operating Voltage

- 12/24VDC

Relative Humidity (indoor application)

- 98% Max., Non-condensing

Operating Temperature

- -20° to +50° C

IP Rating

- IP 65/66 for outdoor

Life Span

- Up to 50,000 hours


Safety Certification Standards

- CE, RoHs

Mechanical Dimensions

- Waterproof flexible ribbon: Length=500mm, Width=10mm, Thickness: 3-4.5mm
- Rigid Aluminum Bar: Length=1000mm & 1500mm, Width=19mm, Thickness: 11mm

Ordering Code

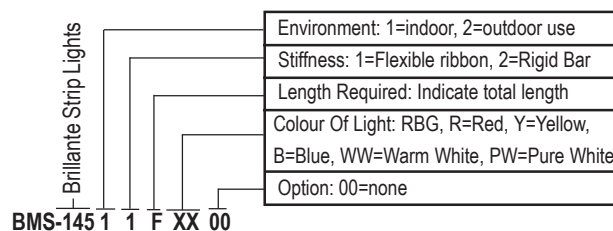

Specifications in this document are subject to change without notice.

BONJOUR ODYSSEY PTE LTD

135 Joo Seng Road, PM Industrial Building, #03-01, Singapore 368363

Tel: 65-64874568, Fax: 65-64876598

Email: Sales@Bonjour-Odyssey.com

URL: www.bonjour-odyssey.com

Bonjour
Odyssey

We Help You Save Energy Costs