

Fauve Series Flood Light BIL 205-x



Overview

Our Fauve Series LED floodlights, which comes in either warm white or cool white, are capable of high performance and lumen intensity. They are ideal for use in large outdoor areas such as external walls, gardens, shipyards and sports fields. Encased in an aluminium alloy die-cast and with a tempered glass cover, our IP 65 standard floodlights are both robust and functional in every sense, able to adequately replace traditional halogen 150W floodlights.

Key Features

- Adjustable LED floodlight made of aluminium die-casting, providing high lumens and performance in various weather conditions
- IP 65 water-resistant standard.
- Good for use in a garden setting where lighting can be inserted into a grass floor-base as opposed to concrete

Ordering Code


Fauve Lights Series	BIL-205	Led Power: 50W
	50	Beam Angle: 120 Degrees
	120A	Lighting Direction: A=Adjustable
	CW	Colour Of Light: WW=Warm White, CW=Cool White
	00	Option: 00 = Without Diffuser

LED POWER

50W

Mechanical Dimensions

285(L) X 235(W) X 148(D) mm

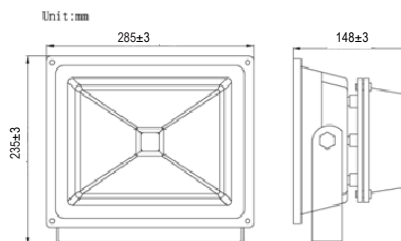

Fauve Series

Data Sheet

Specifications

Lumen Output

- WW: 4250Lm, CW: 4600Lm

Beam Angle

- 120 degrees (others upon request)

Lighting Direction

- Adjustable +/- 180 degrees

Colour Of Light

- Cool White (Typical 6000K)
- Warm White (Typical 3000K)

CRI

- >80

Input Voltage

- 100-240VAC @50HZ

Relative Humidity

- 98% Non-condensing

Operating Temperature

- -20° to +50° C

IP Rating

- IP 65 (Water-resistant Standard)

Life Span

- Up to 40,000 hours

Safety Certification Standards

- CE, FCC, RoHs

Colour Of Body

- Grey, oven baked

Materials

- Heavy duty aluminum

Specifications in this document are subject to change without notice.

BONJOUR ODYSSEY PTE LTD

135 Joo Seng Road, PM Industrial Building, #03-01, Singapore 368363

Tel: 65-64874568, Fax: 65-64876598

Email: Sales@Bonjour-Odyssey.com.sg

URL: www.bonjour-odyssey.com.sg

31 May 2012

Bonjour
Odyssey

We Help You Save Energy Costs